


Packing can be applied in this area to fill the gap to the main chassis rail to support the plywood floor panel. The packing should not trap moisture and be around 6mm in thickness.

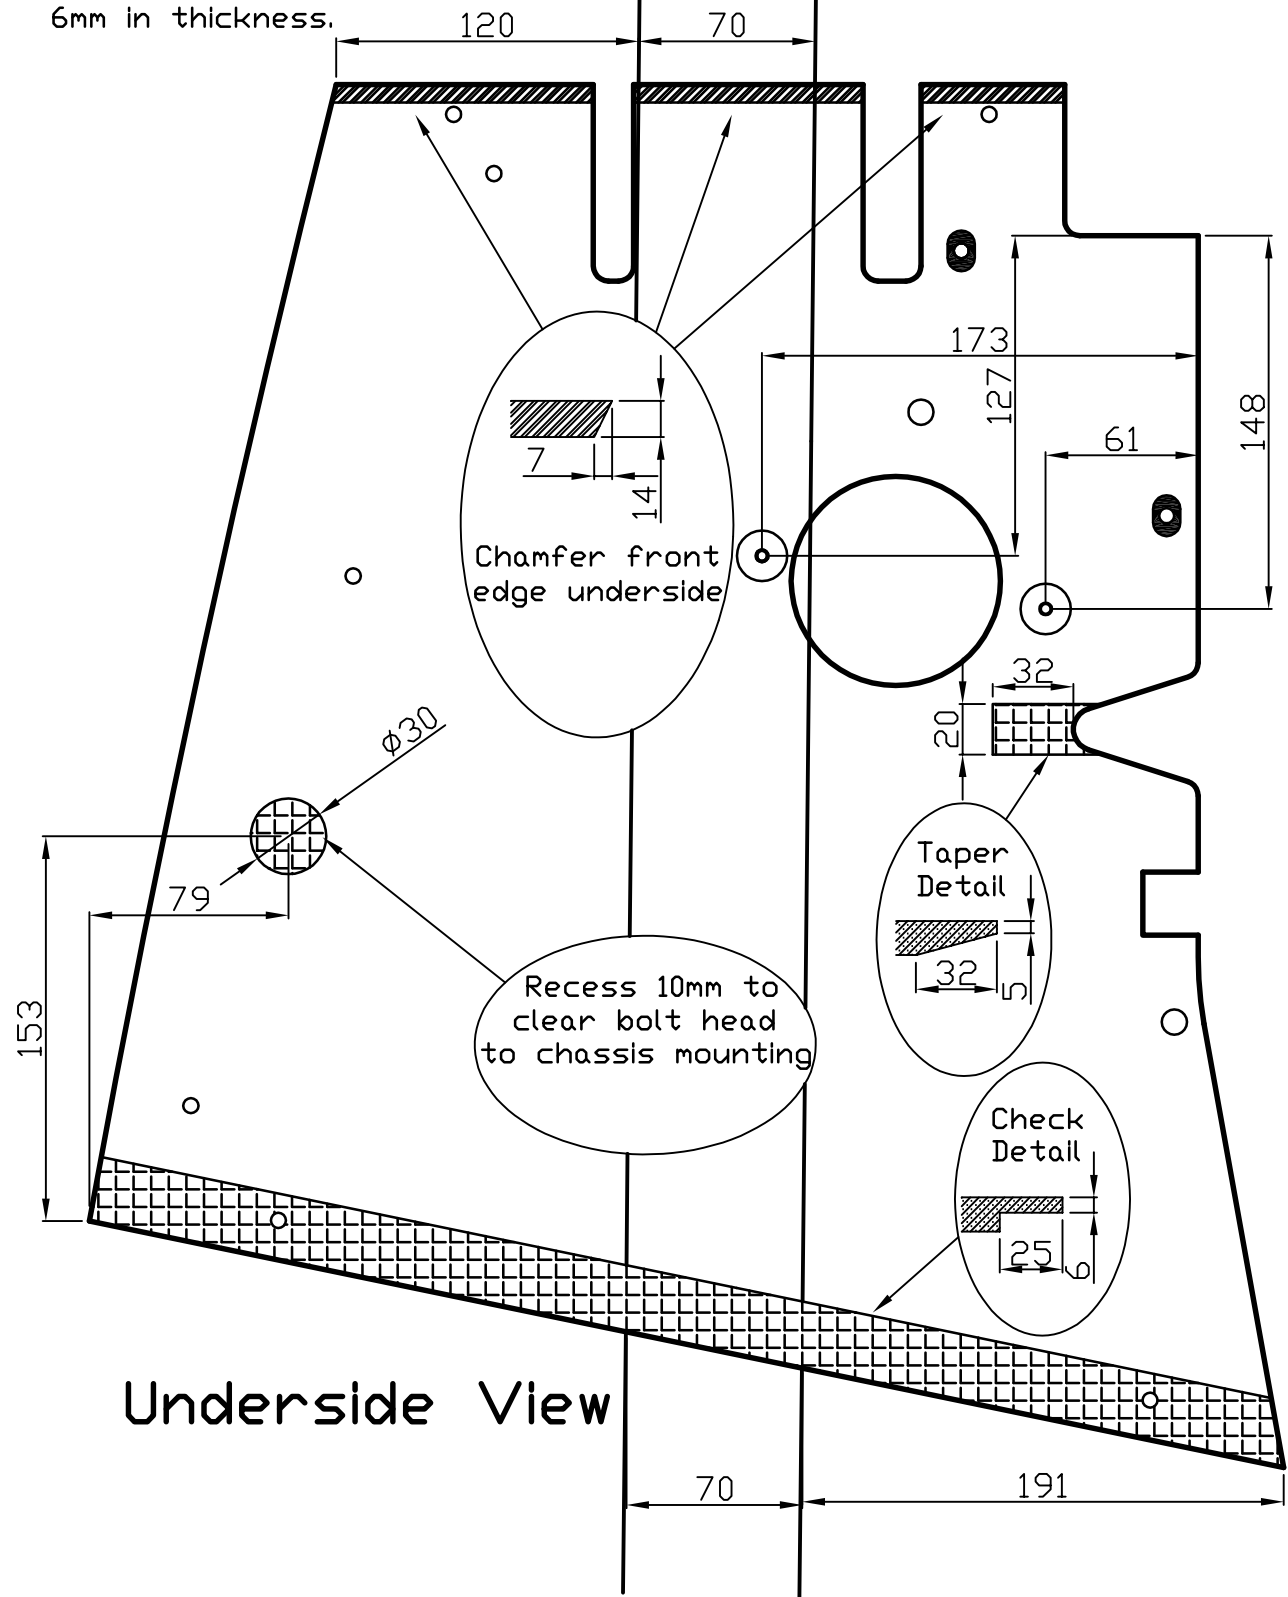

Underside View